







- **Contemporary and functional design**
- **Ergonomic 3D shell shape, especially in the lumbar area of the back**
- **Dynamic seating support**
- **Easy to manipulate**
- **Low maintenance**
- **Large selection of colors**

Parameters and available chair sizes

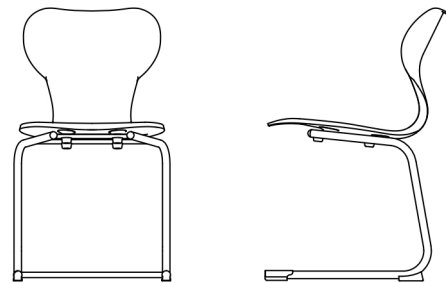
Size	Seat height	Body height
3 	350 mm	119 - 142 cm
4 	380 mm	133 - 159 cm
5 	430 mm	146 - 176,5 cm
6 	460 mm	159 - 188 cm

Dimensions: The overall dimensions and weight of the product vary according size.

Carrying capacity: MAX. 120 KG.

Stackability: Yes

Note: The specified size is (± 10 mm) according to EN 1729 - 1.


Standard chair design

Frame material:	Steel
Frame color:	RAL 9006
Seatshell material:	Polypropylene (PP)
Seatshell color:	RAL 5015, RAL 7015, RAL 120 70 50
Glides:	Without felt

You can view or download the color and accessory adjustment sheets from our website.

Detailed description

The Z93 console chair combines a functional and ergonomic product with a contemporary design.

The frame has a C-shaped cantilever design that gives the chair flexibility and improves seating comfort. 22 mm diameter steel tubes provide flexibility and strength. The steel elements of the chair are powder-coated in neutral RAL 9006 (white aluminium) as standard.

The chair's shell is made of 100% polypropylene and has an anti-slip structure. Its 3D shape provides excellent ergonomics, especially in the back's lumbar region, ensuring comfort even when sitting for long periods. The top of the backrest has a molded grip for easy handling. The shell is available in several standard colors, but almost any color is possible on request.

Carefully selected materials make the chair very easy to clean and maintain.

Maintenance

Metal and plastic surfaces can be maintained with common cleaning agents, with the exception of aggressive cleaners, detergents, polishes, and products containing granules and sand. Do not expose the chair to excessive moisture or running water or to temperatures above 90 °C.