








- **Modern design**
- **Built for cooperation**
- **The design allows seating on three sides**
- **Variable configurations available**
- **Rigid welded construction**
- **Rounded worktop corners for added safety**
- **Low maintenance**



Parameters and available sizes


Size	Worktop height	Body height
3 	590 mm	119 - 142 cm
4 	640 mm	133 - 159 cm
5 	710 mm	146 - 176,5 cm
6 	760 mm	159 - 188 cm
7 	820 mm	174 - 207 cm

Dimensions: The overall dimensions and weight of the product vary according to size.

Carrying capacity: MAX. 120 KG.

Stackability: Yes

Note: The specified size is (± 10 mm) according to EN 1729 - 1.

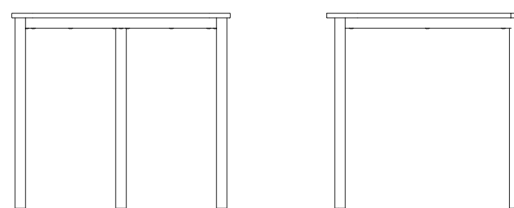

Standard desk design

Frame material:	Steel
Frame color:	RAL 9006
Worktop dimensions:	84x75cm
Worktop material:	Laminated chipboard
Worktop finish:	Beech, white
Glides:	Without felt

You can view or download the color and accessory adjustment sheets from our website.

Detailed description

The triangular table EDU JL66 is a functional and modern furniture element designed for school classrooms. The shape of the worktop offers variable assembly sets suitable for classrooms where group work is a key element of teaching. The open structure of the stand-alone table provides seating on all three sides.

The table's metal frame is welded from 40 mm diameter steel tubes and 40x20 mm steel profiles. The entire structure is standardly treated with powder coating in a neutral shade of RAL 9006 (white aluminium). Individual legs are equipped with rectifying glides to compensate for the floor's unevenness.

The table's worktop measures 84x75 cm and is made of 18mm thick laminated chipboard with a 2mm ABS edge. It also has R80 rounded corners for increased safety.

The table is easy to maintain and easy to clean.

Maintenance

The metal surface and the worktop surface can be maintained with common cleaning agents, except aggressive cleaners, detergents, polishes, and products containing granules and sand. Do not expose the product to excessive moisture, running water, or temperatures above 90 °C.